



**Users Manual  
Premium Series Pulley Driven Pump  
.25 - 3 GPM Series**



**Safety, Operating, Installation,  
and Maintenance Instructions**

# Safety Instructions

**Read all labels and instructions before beginning installation. This equipment meets or exceeds existing electrical codes as defined in the National Electric Code (NEC). Refer to local codes to ensure compliance and always use a licensed contractor for water and electrical hook-ups. Use proper safety equipment during service work.**

**The pump must be grounded. In the event of a malfunction, grounding will reduce the risk of electric shock by providing a path of least resistance for the electric current. The pump is equipped with a cord having a ground conductor and must be plugged into an appropriate outlet that is installed and grounded in accordance with all local codes and ordinances. Improper connection of the equipment grounding can result in a risk of electric shock.**

**IMPORTANT - This pump is equipped with a low water safety switch which requires a minimum of 35 psi from the water service to allow the pump to operate. The switch will prevent the pump from operating if there is not sufficient water pressure on the pump inlet. Once the unit is plumbed and the proper electrical connection has been made, turn on the water supply. The pump is designed to have the water turned on at all times. If the pump does not turn on when the On/Off switch mounted on the side panel is in the On position, or if the pump cycles on and off rapidly, turn the pump off and contact Fogco Customer Service at 800 607 6478.**

**Always use fresh, potable water to supply the system. Do not use water that has not been properly tested or treated for bacteria, contaminants, etc... Completely drain the system after each use.**

**This pump is non-submersible and rated for a maximum operating pressure of 1000 PSI. The pressure regulator is set from the factory and SHOULD NOT EXCEED 1000 PSI/70 Bar. Changing the pressure output on the pump may create a dangerous situation and will void any Fogco warranties. All pumps have been evaluated for use with water only. Do not use with flammable liquids.**

## Maintenance Instructions

### Water Seals

- This pump contains water seals that wear with use and will need to be replaced periodically. Water seals are NOT a warranty item. Depending on operating conditions and water quality, the water seals will last between 500 and 2000 hours of operation. Once the seals are sufficiently worn, they will allow water to drip from beneath the brass head on the pump indicating the need for replacement. Failure to replace the seals once they have begun to leak will cause extensive damage to the pump.

### Changing Pump Oil

- Oil should be changed after the first 50 hours and then once a year or every 500 hours of operation, whichever comes first. Run pump for 15 minutes prior to changing the pump oil. Check the pump for leaking water seals while the pump is running.
- Locate the oil drain fitting on the bottom side of the pump, remove the cap and drain the oil into a container. Dispose of the used oil at a proper oil disposal facility.
- After draining is completed, replace drain cap and fill pump with **FOGCO Pump Oil 93222**. Oil will show ½ full in sight window when pump is full.

### Drive Belt Inspection

- When ever changing the oil, check the belt tension and inspect for cracks or abnormal wearing.
- If the belt has more than ½" deflect, loosen the mounting bolts for the motor and slide the motor away from the pump to create the necessary tension. Tighten motor mounting bolts securely.

### Water Filter Inspection

- To insure the long life of the pump the external filter element needs to be replaced at least every 6 months. The time in between replacements will vary depending on the use of the system and the condition of the water.

## Fog System

- The nozzles, anti-drip valve, and auto drain valves should be inspected twice a year to ensure proper performance.
- If mineral deposits affect the operation of these items, the component should be removed from the system and cleaned using the Fogco Nozzle Cleaner.
- If cleaning does not improve the performance, the components should be replaced.

## Pump Component Replacement

All repair or replacement of components must be completed by a Fogco Authorized Factory Service Center or a Fogco Authorized Contractor. Contact our Customer Service Department for more information.

# Installation & Operating Instructions

## Operation of the Pump

Never power the Premium Series pumps while the cover is removed. All pump repair and replacement service work must be performed by a Factory Authorized Service Center or a Factory Authorized Contractor.

The Fogco pumps are designed for use with the appropriately rated tubing and fittings to create a fog system for outdoor cooling, humidification, dust and odor control, fire suppression, and Mistscaping. **All Safety Instructions and Operating Instructions should be followed to ensure safe operation of the equipment.**

- The pump should be installed above top grade level on a solid foundation. It should be in a cool, dry location with easy access to water and power. It should be located near a drain.
- If the system will be used in freezing conditions, the pump should be located in a place where the temperature can be maintained and all water lines should be drained after each use.
- **The power supply to the pump must be a dedicated circuit with a breaker capacity as listed below**


**15 Amp: 5050116**

**20 Amp: 5050216, 5100116, 5100216, 5150116, 5150216, 5200216, 5300216**

- The water supply should be a constant and should provide 2 times the pumps rated flow with the appropriately sized feed line as prescribed in the Installation Instructions.
- When connecting the pump directly to any rigid line, always install a flexible outlet hose on the pump. This will reduce the vibration transferred from the pump to the rigid tubing.
- The On/Off operation of the Premium Series pumps is controlled by the switch on the pump side panel.
- This pump includes an hour meter that will track the hours of operation and should be used to determine the necessary maintenance for the pump.
- Check the oil level with the dipstick and the sight gauge. The proper level is  $\frac{1}{2}$  full on the sight gauge.
- Check the belt tension on all pulley driven units to insure the belt is tight (no more than  $\frac{1}{2}$ " deflect). See the Maintenance Instructions for details on adjusting the belt tension.

## Water filtration is required for every pump.

- A Fogco Filter Starter Kit is recommended for pumps up to 3 GPM. When installing the filter, flush for thirty seconds before connecting to the pump. Replace cartridges as needed but no less than once a year.

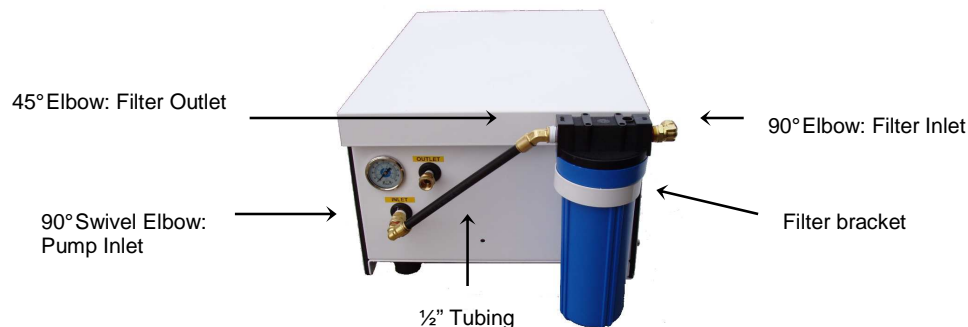

# Technical Information


## Premium Series Electric Data and Specifications

Model	Size	GPM	Motor HP	Unit RPM	Volts / Phase	Full Load Amps	Dimension In.	Weight Lbs
5050116	.5	.5	.5	490	115 / 1	8.5	26 x 16 x 12	90
5050216	.5	.5	.5	490	230 / 1	4.3	26 x 16 x 12	90
5100116	1	1	1	490	115 / 1	14	26 x 16 x 12	110
5100216	1	1	1	490	230 / 1	7	26 x 16 x 12	110
5150116	1.5	1	1	750	115/1	14	26 x 16 x 12	110
5150216	1.5	1	1	750	230/1	7	26 x 16 x 12	110
5200216	2	1.5	1.5	930	230 / 1	10.2	26 x 16 x 12	110
5300216	3	3	3	1475	230/ 1	15	26 x 16 x 12	130

Full Load Amps are the average amp draw for the pump and will vary from unit to unit. All information listed is subject to change.

Model #	Bare Pump	Electric Motor	Pressure Switch	Unloader Valve	Pressure Gauge	Solenoid Valve	On/Off Switch	Exhaust Fan	Power Cord	Drive Belt	Motor Pulley	Pump Pulley
5050116	93650	93530	92509	93521	93108	93368	93109	92995	93174	93173	93171	93172
5050216	93650	93530	92509	93521	93108	93596	93109	93148	93153	93173	93171	93172
5100116	94055	94067	92509	93521	93108	93368	93109	92995	93178	93173	93171	93172
5100216	94055	94067	92509	93521	93108	93596	93109	93148	93153	93173	93171	93172
5150116	94055	94067	92509	93521	93108	93368	93109	92995	93178	93661	93176	93172
5150216	94055	94067	92509	93521	93108	93596	93109	93148	93153	93661	93176	93172
5200216	94055	92886	92509	93521	93108	93596	93109	93148	93153	93110	93176	93177
5300216	94055	93103	92509	93521	93108	93233	93109	93148	93153	93110	93105	93107

## Premium Series Pump Replacement Parts

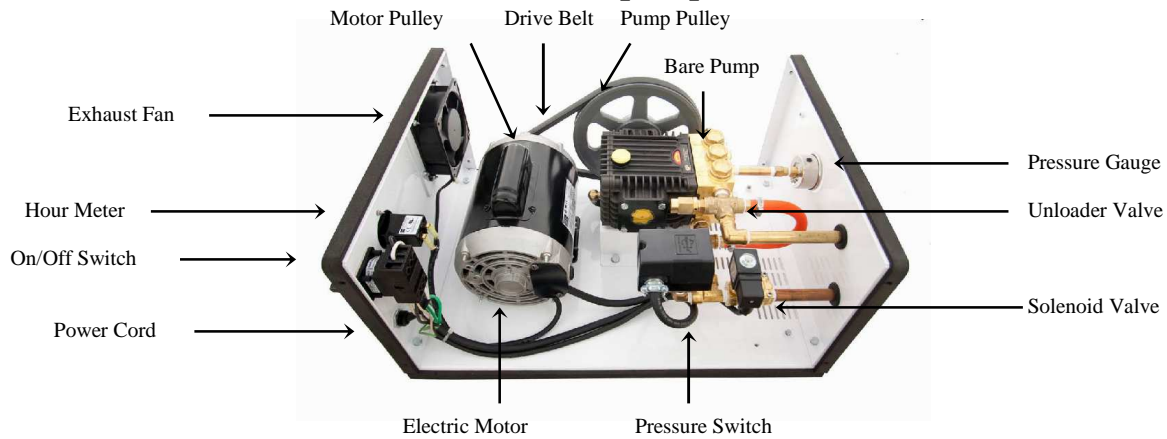

## Premium Series Pump Wiring Diagram

