


HIGH EFFICIENCY

AC POWERED VENTURI FANS




FOGCO



12" AC EC SNAP-FAN



- High efficiency industrial grade AC Electronically Commutated (EC) motor - designed to run direct on your inverter, generator or standard power systems
- Motor RPM can be custom configured to fit your application
- patented aerodynamic motor mounting system
- Glass reinforced polypropylene airfoil blade with di-cast aluminum hub gives balanced, smooth and quiet performance.
- Rugged corrosion resistant frame molded to maximize airflow
- All parts serviceable and/or replaceable
- Warranty of 2 years against parts and labor

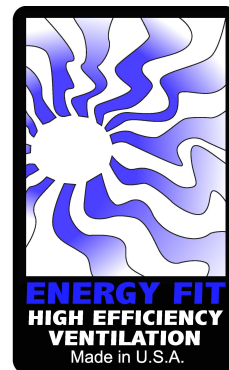

SNAP-FAN 12" / 16" / 20" / 24"

Fogco
600 S. 56th Street, Suite #9
Chandler, AZ 85226

T: (800) 607-6478
E: info@snap-fan.com
W: snap-fan.com

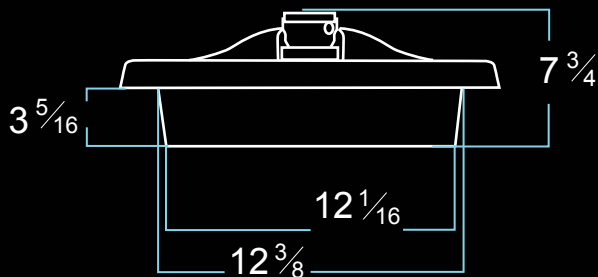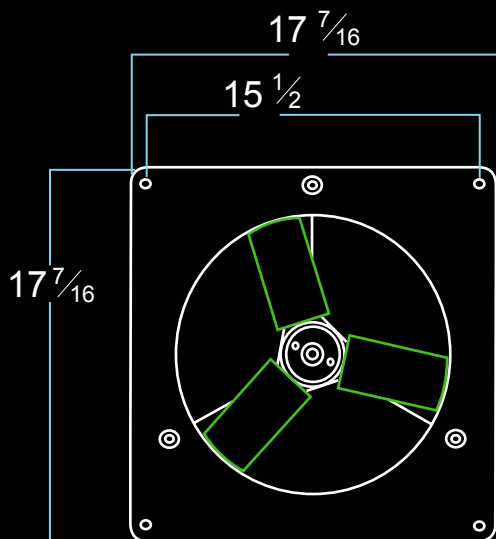

ELECTRICAL EQUIPMENT. CHECK WITH LOCAL BUILDING CODES AND YOUR LICENSED CONTRACTOR BEFORE INSTALLING.


Partner:

ENERGY FIT 12" ECM

120 VAC	STATIC PRESSURE (IN H2O)	AIRFLOW (CFM)	RPM	AMPS	WATTS*	CFM/WATT
	0.00	1030	1349	.56	39	26.4
Factory	0.05	930	1334	.57	40	23.2
Default	0.10	810	1323	.59	41	19.7

*AMPS x VOLTS x 0.6 POWER FACTOR for non linear applications such as ECM

We can custom program motor RPM to fit your application.

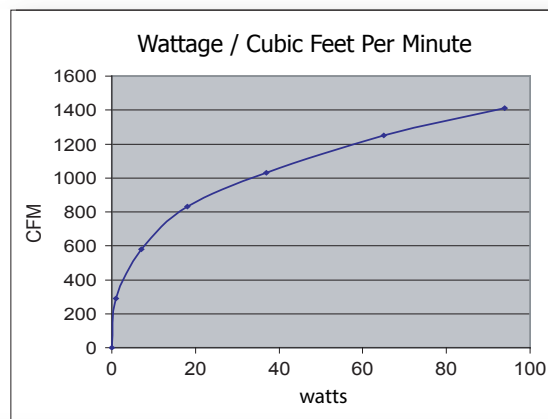

ULTIMATE FLEXIBILITY

Electronic Commutated Motors

Sourced from Morrill Motors*

Specification

Voltage:	115V (90-132) Standard 208-238V (180-264) (Special Order) Single Phase (Special Order)
RPM Range:	500-1800
Output:	1/15 HP (1/10 HP optional)
Efficiency:	~68% peak
Speeds:	Up to 2 (speed regulated +/- 6%)
Rotation:	CCW for PWM and commanded for DSI
Programmable:	The speeds range, rotation, and operating type come configured from Snap-Fan.
ICE version:	Variable speed via PWM or 0-10 Vdc
Storage Temps:	-40° to 80° C ambient
Operating Temps:	-40° to 55° C ambient
Design Life:	10 years: 83,720 hours on time (for typical evaporator fan applications)

*morrillmotors.com

DESIGNED AND HAND ASSEMBLED IN CHANDLER, AZ BY **FOGCO** PATENTED DESIGN